
PRODUCT DATA SHEET

RHINO SHRINK WRAP TAPE – DOUBLE SIDED

rhinoshrinkwrap.com

DESCRIPTION

Our double sided shrink wrap tape, often referred to as 'jelly tape', features a 1mm thick solvent-free rubber resin adhesive for strong, reliable bonding. It's ideal for holding two sheets of shrink wrap together prior to heat welding and can also be used to create a secure final seal.

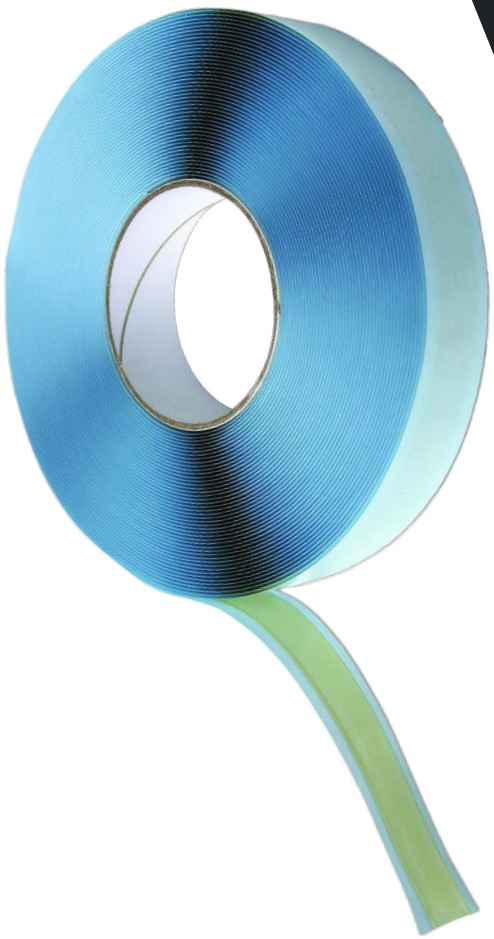

TYPICAL APPLICATIONS

- Holding shrink wrap sheets before heat welding
- Securing overlaps during installation
- Temporary positioning before welding

PRODUCT INFORMATION

PROPERTY	VALUE
Type	Thick adhesive rubber tape
Material	Solvent free rubber resin based hot melt adhesive
Dimensions	19mm x 20m
UV resistance	n/a – intended for use between shrink wrap sheets

TECHNICAL PROPERTIES

PROPERTY	TEST METHOD	SPECIFICATIONS
Density	Internal	0,98g/cm-^{3}
Softening Point	Internal	85°C
Cohesion	Internal	0,6N/mm-^{2}
Tack	Internal	30mm
Service Temperature		0 to +40°C
Storage Temperature		+12˚C to +25˚C
Application Temperature		-10°C to +40°C

NOTE

The information in this datasheet is believed to be accurate at the time of publication and is provided for guidance only. Unless otherwise stated, all values shown are typical. Rhino Shrink Wrap® reserves the right to amend product specifications without notice. Users are responsible for determining the suitability of the product for their intended application.

Doc. No: DAT_TAP_004 Revison: 1.0 Date: 03. 07. 2026